


- 1) CEMENT MORTAR POINTING
- 2) CHASE IN CONCRETE
- 3) CONCRETE
- 4) MIN. 150MM HIGH 13MM TWO COAT SKIRTING WITH ANGLE FILLET AND SOLAR REFLECTIVE PAINT
- 5) SOLAR REFLECTIVE TREATMENT
- 6) 20MM TWO COAT MASTIC ASPHALT
- 7) SEPARATING MEMBRANE
- 8) BOARD TYPE THERMAL INSULANT
- 9) VAPOUR CONTROL LAYER
- 10) CEMENTITIOUS SCREED LAID TO FALLS
- 11) CONCRETE ROOF DECK

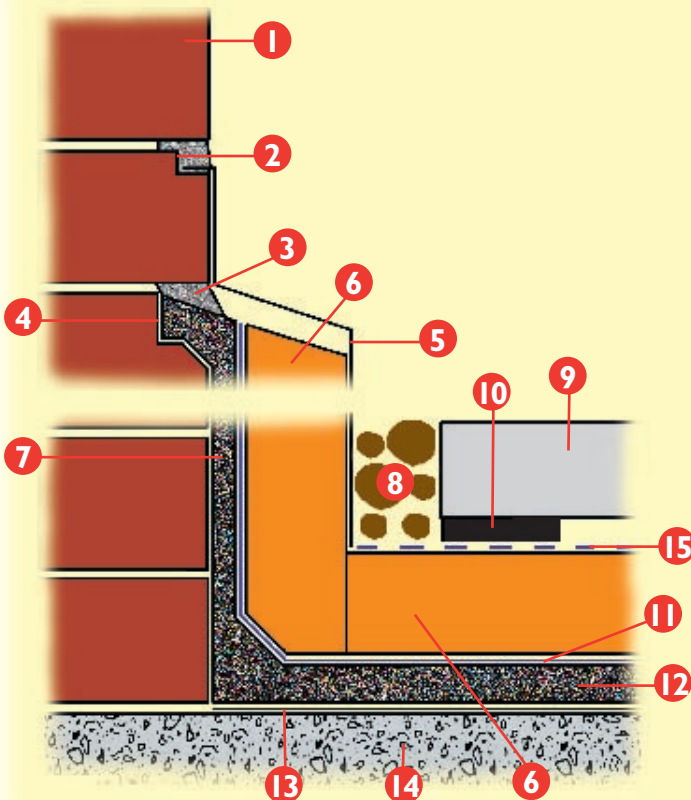

- 1) BRICKWORK
- 2) CHASE FOR COVER FLASHING
- 3) CEMENT MORTAR POINTING
- 4) CHASE IN BRICKWORK
- 5) SUITABLE COVER FLASHING
- 6) BOARD TYPE THERMAL INSULANT
- 7) 13MM TWO COAT SKIRTING WITH ANGLE FILLET (TO BE MIN. 150MM ABOVE PAVED/BALLAST LEVEL)
- 8) PAVINGS KEPT BACK 75MM AT MARGINS
- 9) PAVING SLABS OR GRAVEL
- 10) PROPRIETARY SUPPORTS OR ROOFING FELT PACKING PIECES UNDER PAVING SLABS
- 11) NON-WOVEN POLYESTER FLEECE ISOLATING MEMBRANE
- 12) 20MM TWO COAT MASTIC ASPHALT
- 13) SEPARATING MEMBRANE
- 14) CONCRETE ROOF DECK TO FALLS
- 15) FILTER MEMBRANE IF REQUIRED BY INSULATION MANUFACTURER