


### 13 Internal levels of multi-storey car parks - no waterproofing requirement

This specification is intended for internal levels where external rainwater is brought into the car park by vehicles

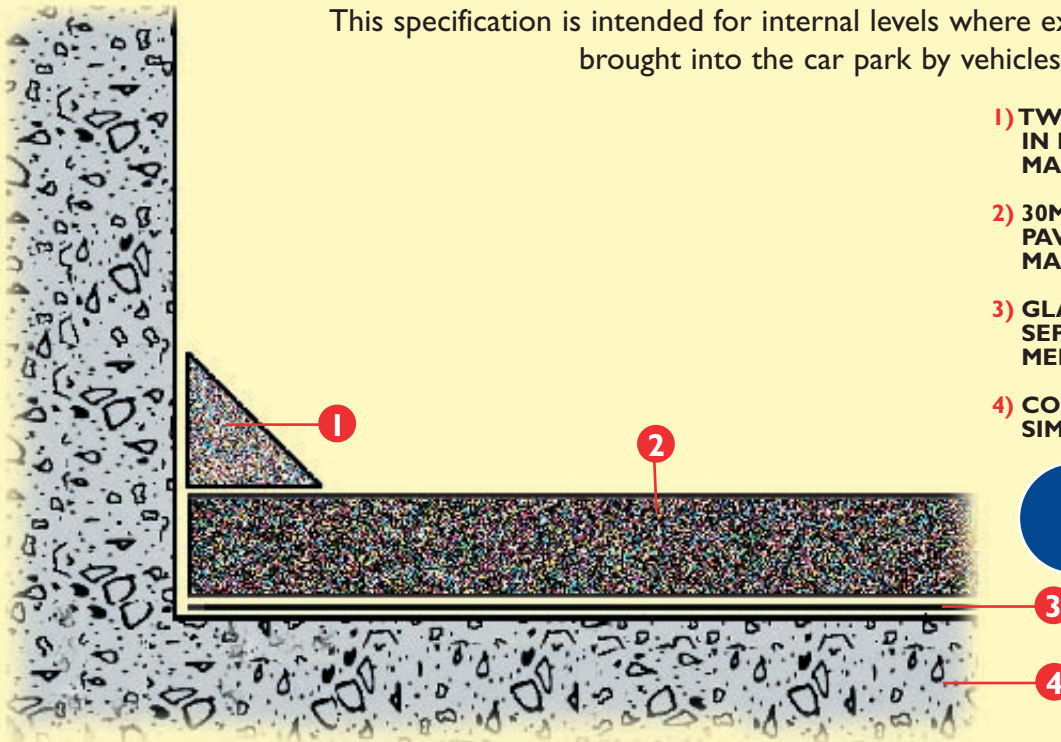


- 1) TWO COAT FILLET IN ROOFING GRADE MASTIC ASPHALT
- 2) 30MM ONE COAT PAVING GRADE MASTIC ASPHALT
- 3) GLASS FIBRE TISSUE SEPARATING MEMBRANE
- 4) CONCRETE OR SIMILAR DECK

## PAVING Pt 1

### Areas accessed by pedestrians

### 14 General duty and public access decks and podia

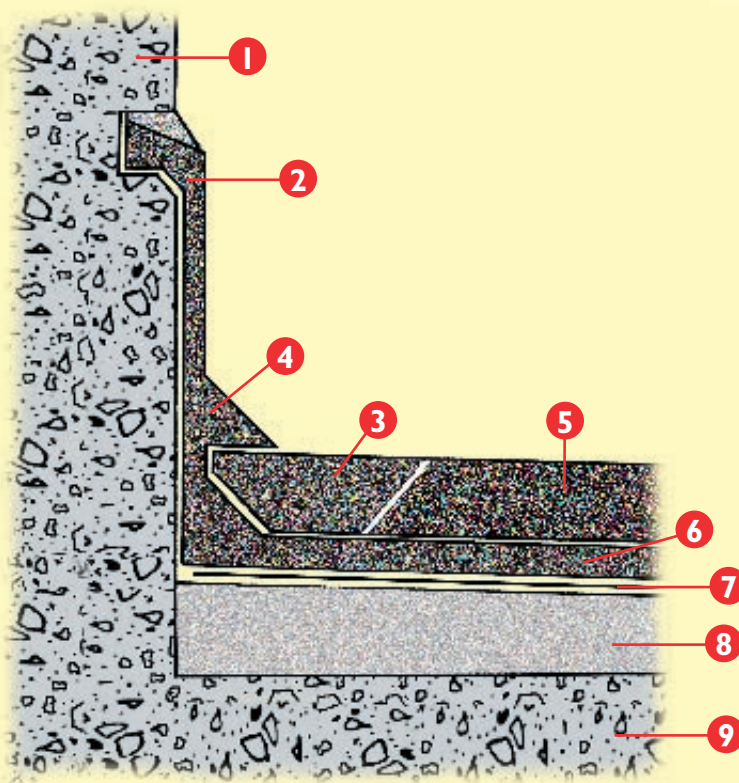

- 1) CONCRETE OR BRICKWORK
- 2) SKIRTING AS DESCRIBED IN ROOFING SECTION
- 3) 100MM WIDE MARGIN IN ROOFING GRADE MASTIC ASPHALT
- 4) ADDITIONAL ANGLE FILLET APPLIED AFTER PAVING GRADE IS LAID
- 5) 25MM ONE COAT PAVING GRADE MASTIC ASPHALT
- 6) 13MM ONE COAT ROOFING GRADE MASTIC ASPHALT
- 7) SEPARATING MEMBRANE
- 8) CEMENTITIOUS SCREED LAID TO FALLS
- 9) CONCRETE OR SIMILAR DECK