


### 3 Drainage channels in carriageways

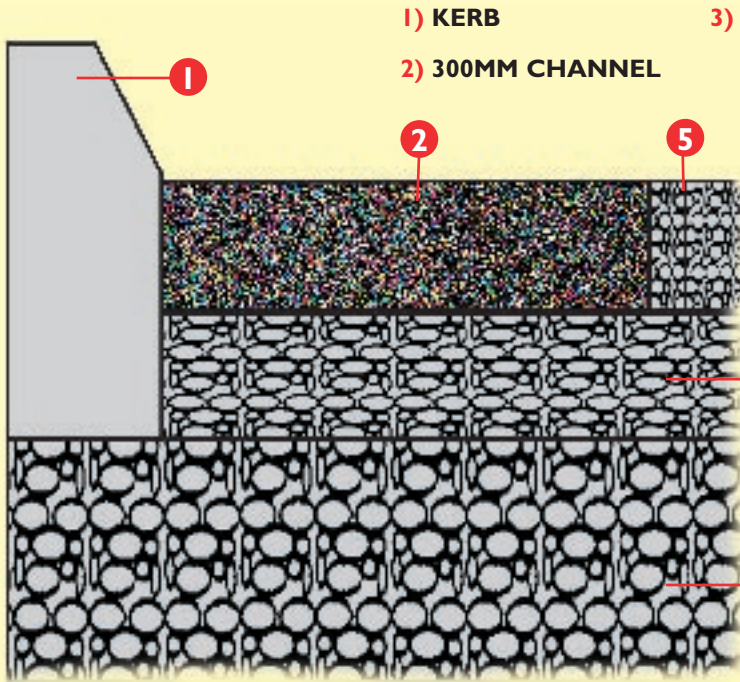

Thickness as specified in wearing course BS1447:1988 Type T50 Grade S with additional 40% 6mm aggregate.

No precoated chippings are to be placed in the 300mm channel.

Where false falls are required on carriageways or where high quality drainage channels are difficult to guarantee on sites

where hand laid HRA is likely to be used, the

channels can be pre-laid before the machine-laid wearing course. The paving of the wearing course can then follow the pre-laid channel.

## PAVING Pt 2