


- 1) CEMENT MORTAR POINTING
- 2) SINGLE LAYER HIGH PERFORMANCE MINERAL ROOFING FELT PROTECTION OR REFLECTIVE PAINT
- 3) 20MM THREE COAT VERTICAL MASTIC ASPHALT (TO BE MIN. 150MM ABOVE LANDSCAPED LEVEL)
- 4) SOIL AND VEGETATION
- 5) FILTER MEMBRANE
- 6) DRAINAGE LAYER
- 7) FLEXIBLE BOARD
- 8) PAVING SLABS OR SIMILAR PROTECTION
- 9) BOARD TYPE THERMAL INSULANT
- 10) NON-WOVEN POLYESTER FLEECE ISOLATING MEMBRANE
- 11) 30MM THREE COAT MASTIC ASPHALT
- 12) SEPARATING MEMBRANE
- 13) CONCRETE ROOF DECK OR SCREED LAID TO FALLS

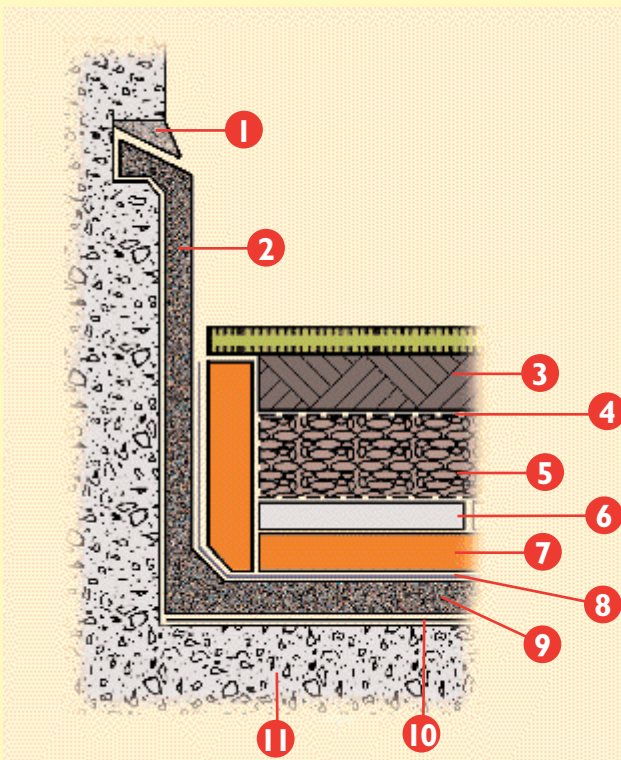

- 1) CEMENT MORTAR POINTING
- 2) 20MM THREE COAT VERTICAL MASTIC ASPHALT (TO BE MIN. 150MM ABOVE LANDSCAPED LEVEL)
- 3) SOIL AND VEGETATION
- 4) FILTER MEMBRANE
- 5) DRAINAGE LAYER
- 6) PAVING SLABS OR SIMILAR PROTECTION
- 7) BOARD TYPE THERMAL INSULANT
- 8) NON-WOVEN POLYESTER FLEECE ISOLATING MEMBRANE
- 9) 30MM THREE COAT MASTIC ASPHALT
- 10) SEPARATING MEMBRANE
- 11) CONCRETE ROOF DECK OR SCREED LAID TO FALLS