


- 1) BRICKWORK
- 2) CEMENT MORTAR POINTING
- 3) CHASE IN BRICKWORK
- 4) 13MM TWO COAT SKIRTING WITH ANGLE FILLET AND SOLAR REFLECTING PAINT (TO BE MIN. 150MM ABOVE PAVED LEVEL)
- 5) LIGHT COLOURED PEDESTRIAN TILES BEDDED IN A COMPOUND IN ACCORDANCE WITH THE MANUFACTURERS' RECOMMENDATIONS
- 6) 20MM TWO COAT MASTIC ASPHALT
- 7) SEPARATING MEMBRANE
- 8) CEMENTITIOUS SCREED LAID TO FALLS
- 9) CONCRETE ROOF DECK

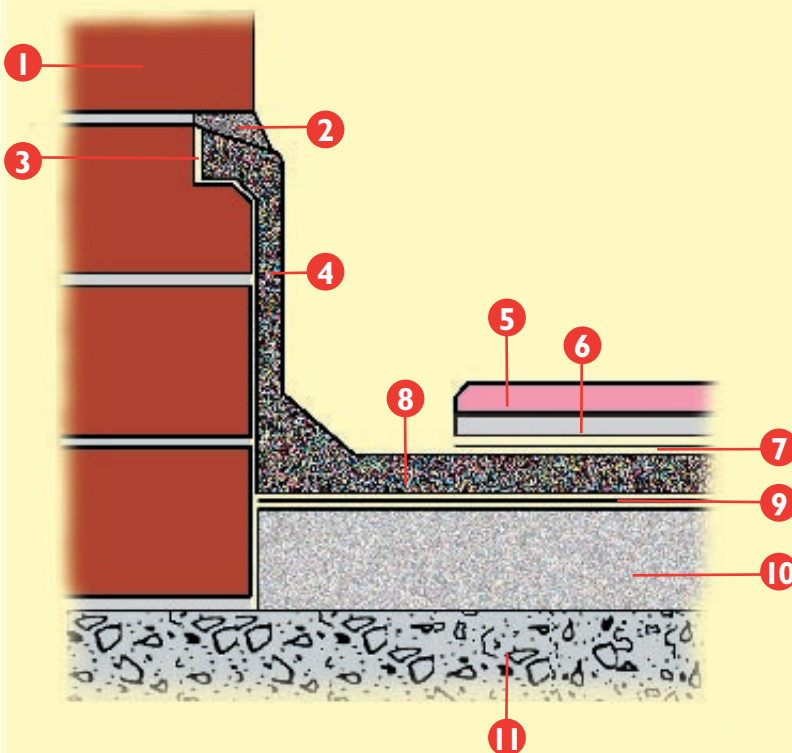

- 1) BRICKWORK
- 2) CEMENT MORTAR POINTING
- 3) CHASE IN BRICKWORK
- 4) 13MM TWO COAT SKIRTING WITH ANGLE FILLET AND SOLAR -REFLECTIVE PAINT (TO BE MIN. 150MM ABOVE PAVED LEVEL)
- 5) CONCRETE TILES, CERAMIC TILES OR QUARRY TILES SET BACK 75MM AT PERIMETERS
- 6) CEMENT MORTAR BEDDING
- 7) WATERPROOF BUILDING PAPER OR SIMILAR ISOLATING MEMBRANE
- 8) 20MM TWO COAT MASTIC ASPHALT
- 9) SEPARATING MEMBRANE
- 10) CEMENTITIOUS SCREED LAID TO FALLS
- 11) CONCRETE ROOF DECK