


# Typical specifications

## I Carriageways

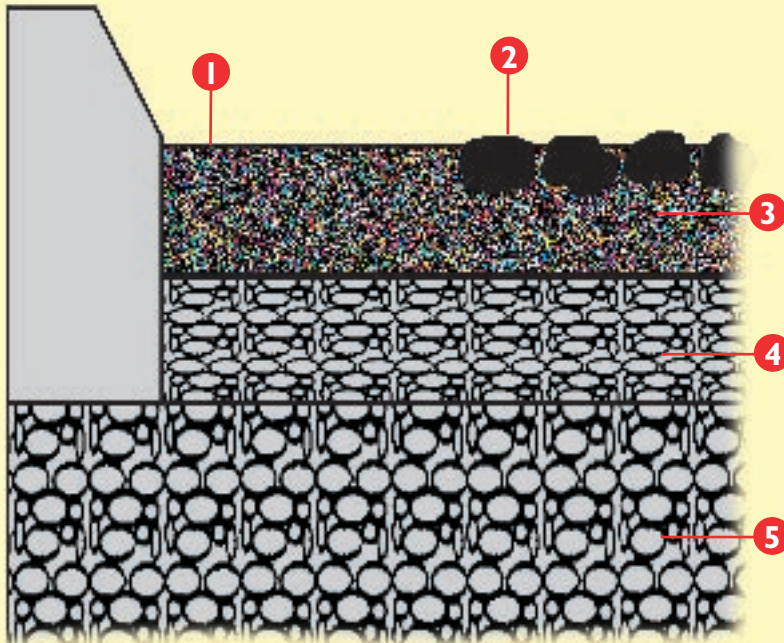

1) 300MM UNCHIPPED DRAINAGE CHANNEL

2) 14 OR 20MM PRECOATED CHIPPINGS\*

3) 40MM WEARING COURSE TO BS1447:1988 TYPE T50 GRADE S WITH ADDITIONAL 40% 10MM AGGREGATE

4) EXISTING BASECOURSE TO EITHER BS594 OR BS4987

5) EXISTING BASE

\*CLIENT TO SPECIFY PSV & AAV OF AGGREGATE

## PAVING Pt 2

1) 300MM UNCHIPPED DRAINAGE CHANNEL

2) 14 OR 20MM PRECOATED CHIPPINGS\*

3) 40MM WEARING COURSE TO BS1447:1988 TYPE T50 GRADE S WITH ADDITIONAL 40% 10MM AGGREGATE

4) CONCRETE BASE

\*CLIENT TO SPECIFY PSV & AAV OF AGGREGATE

