


## 5 Loading Bays - without waterproofing




Butt strap to assist in forming secure bay joint when required

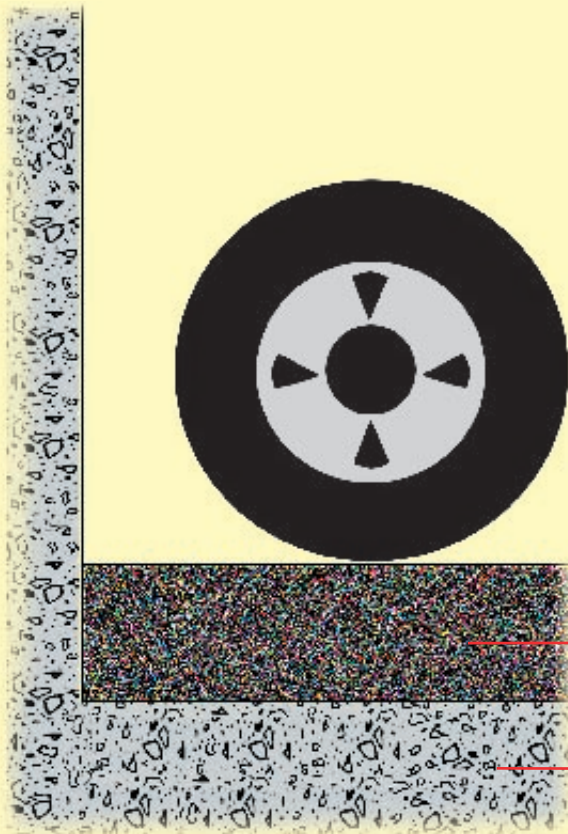

- 1) BAY JOINT IN PAVING
- 2) 300MM WIDE X 10MM THICK BUTT STRAP IN ROOFING GRADE MASTIC ASPHALT
- 3) 40MM ONE COAT PAVING GRADE MASTIC ASPHALT (BS 1447:1988 TYPE T50 GRADE H)
- 4) CONCRETE BASE OR SCREEDS LAID TO FALLS

# PAVING Pt 2

## 6 Edge finish to loading docks or bays

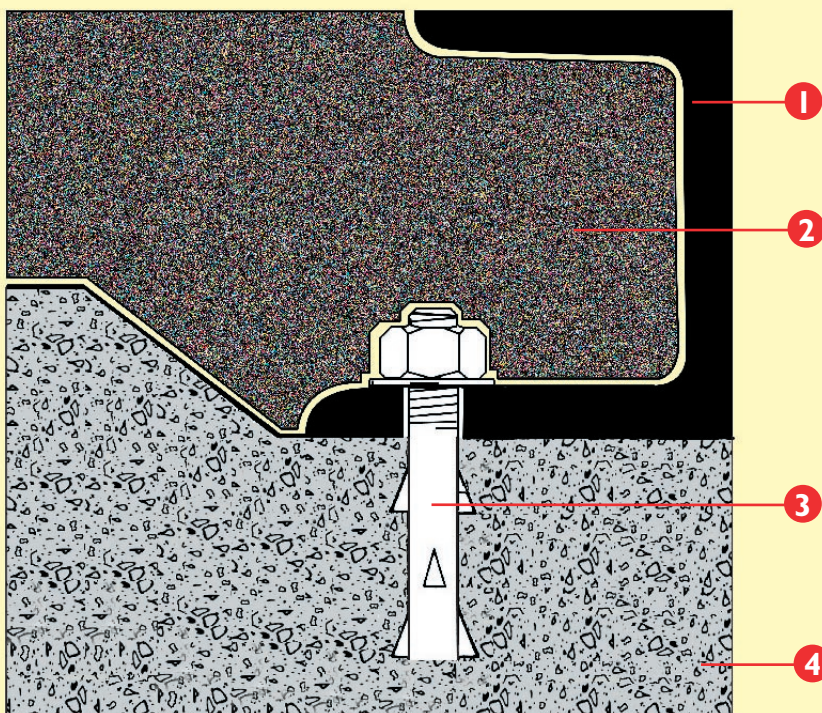

- 1) STEEL CHANNEL SECURELY FIXED TO BASE
- 2) PAVING GRADE MASTIC ASPHALT. THICKNESS DEPENDENT ON ANTICIPATED USAGE
- 3) FILM FIXING FOR STEEL CHANNEL
- 4) CONCRETE OF SIMILAR DECK