



3 Metal roof deck with free standing kerb (warm roof)

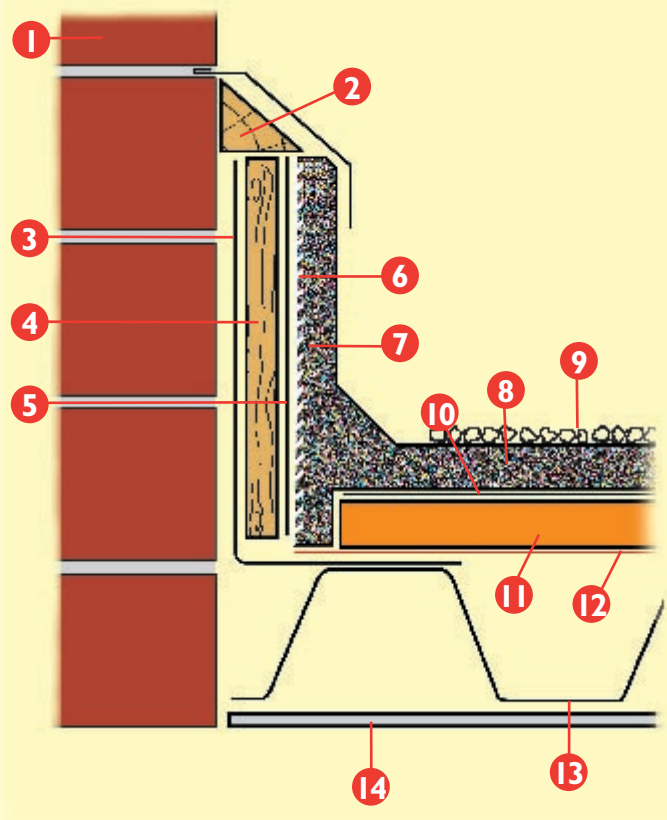

- 1) BRICKWORK
- 2) FLASHING FIXED WITH TRADITIONAL PLUMBERS DETAIL INCLUDING TIMBER FILLET
- 3) METAL ANGLE
- 4) TIMBER UPSTAND
- 5) SEPARATING MEMBRANE
- 6) EXPANDED METAL LATHING. ALTERNATIVELY A METAL UPSTAND WITH SPOT WELDED EXPANDED METAL LATHING MAY BE USED
- 7) MIN. 150MM HIGH 20MM THREE COAT MASTIC ASPHALT SKIRTING WITH ANGLE FILLET AND SOLAR REFLECTIVE PAINT
- 8) 20MM TWO COAT MASTIC ASPHALT
- 9) SOLAR REFLECTIVE TREATMENT
- 10) SEPARATING MEMBRANE
- 11) BOARD TYPE THERMAL INSULANT
- 12) VAPOUR CONTROL LAYER
- 13) METAL ROOF DECK TO FALLS
- 14) CEILING

4 Concrete roof deck and skirting (cold roof)

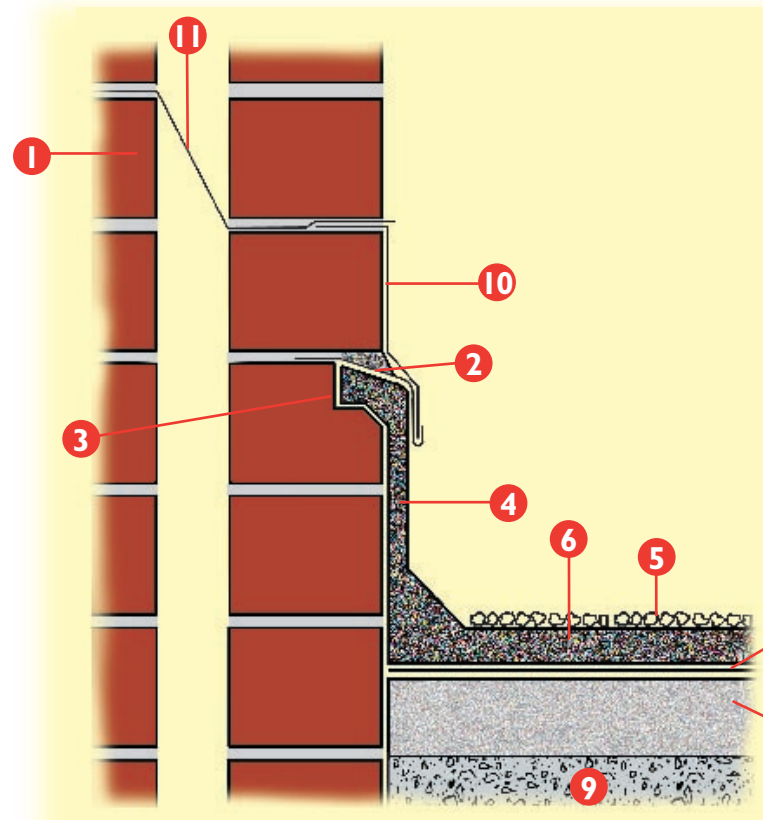

- 1) BRICKWORK
- 2) CEMENT MORTAR POINTING
- 3) CHASE IN BRICKWORK
- 4) MIN. 150MM HIGH 13MM TWO COAT SKIRTING WITH ANGLE FILLET AND SOLAR REFLECTIVE PAINT
- 5) SOLAR REFLECTIVE TREATMENT
- 6) 20MM TWO COAT MASTIC ASPHALT
- 7) SEPARATING MEMBRANE
- 8) CEMENTITIOUS SCREED LAID TO FALLS
- 9) CONCRETE ROOF DECK
- 10) FLASHING FIXED WITH TRADITIONAL PLUMBER'S DETAIL
- 11) CAVITY TRAY OR DPC